


Quick Start Guide—Insert

Dims: w130mm x h318mm | Ink: 4C/4C | Stock: 80# Book

File updated: Nov 13, 2018

Version tracking date code = YYYYMMDD

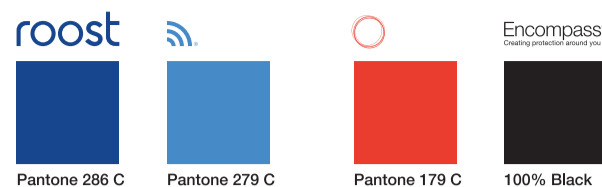

RSW-200B
TOSV-2

Quick Start Guide for Roost Smart Home Sensor Kit

WELCOME! BEFORE YOU GET STARTED:

- DO NOT REMOVE THE RED TAB** until instructed to do so in the app.
- WI-FI PASSWORD.** Please **find or confirm your home Wi-Fi password.**
My Wi-Fi password:
- FOLLOW MOBILE APP INSTRUCTIONS.** Review each step in the app carefully.
- NEED HELP?** Please review the Quick Troubleshooting Guide on the back of this pamphlet OR get help:
 - Online help center getroost.com/support
 - Email support@getroost.com
 - Schedule a call getroost.com/Callme

CONNECT YOUR ROOST DEVICES TO YOUR WI-FI NETWORK:

Download the Encompass Smart Home App

Install the "Encompass Smart Home" App from the Apple App Store or Google Play Store on your smartphone. Or go to encompassinsurance.com/roost in a mobile web browser.



Create an account

Open the app and create an Encompass Smart Home account.

Add a new device

Follow the instructions in the Encompass Smart Home App to **add a new device** and connect it to **your** Wi-Fi network. Repeat for any additional devices.

Add custom information

Smart leak detector: After your device has successfully connected, your app will prompt you to set custom temperature and humidity settings. Adjust settings or use defaults. You can also change these later. Please note, the water sensing function of the leak detector is not influenced by the humidity alert setting.

Smart 9V battery: Add your alarm information: manufacturer, model, and date of manufacture. Please note, the battery is only warranted in alarms less than 10 years old.


EXTRA HELP ON CHOOSING "ROOST-DEVICE" IN WI-FI SETTINGS

NOTE: This is not the end of the setup process. You must return to the Encompass Smart Home App to complete the connection of the leak detector or battery to your Wi-Fi network.

- After going to your phone's Wi-Fi settings, **select the network** beginning with "Roost-device".

Some phones may say there is no internet connection from Roost-device Wi-Fi or that it is an unsecured network. Both of these are OK. If you see a pop-up warning here, tap OK to dismiss it.

- Once you are **connected** to the network beginning with "Roost-device", go back and **open the Encompass Smart Home App again** and follow the instructions to complete setup. Unsure how to do this? Watch the Roost install video.

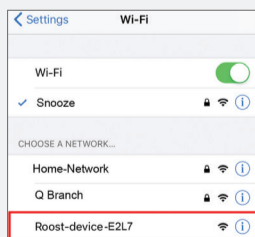

Continued on back...

TEST YOUR DEVICES (AFTER CONNECTING THEM TO WI-FI)

Test your leak detector

- Move the detector to the location where you wish to use it.
- Dampen your finger and place it across the silver rings on the bottom of the detector.
- You will hear a series of beeps, the detector's LED will flash red, and you will get a notification on your smartphone. Your leak detector is working correctly, and you have adequate Wi-Fi signal where you want to place the detector.
- Completely dry off the detector, especially between the silver rings, to silence the leak detector alert beeps. This may take several seconds.

Test your Smart 9V Battery

- Install the battery in your smoke alarm.
- Please press your smoke alarm's "Test button" for at least 10 seconds so that the alarm sounds.
- You will receive a notification on your smartphone of this alarm.

QUICK SETUP TROUBLESHOOTING GUIDE:

- Prior to attempting to connect a Roost device to your Wi-Fi network, make sure it is in setup mode:

Leak detector setup mode: the LED under the top cover must be blinking green during setup. If not, reset the detector to enter setup mode. Press the button in the blue circular rings on the bottom of the device so that it clicks. Wait a few seconds for a beep and the device is in setup mode.

Battery setup mode: the LED on the side of the battery must be blinking red during setup. If not, reset the battery to enter setup mode. To reset the battery, remove the Smart Module (the small rectangular piece) on the bottom of the battery. Wait 10 seconds. Put the Smart Module back on the battery. Wait a few seconds for a beep and the device is in setup mode.

- Follow the instructions in the app.** At the end of the setup process, if the device is not successful in connecting to your Wi-Fi network, **the device will make a few short beeps.** The beeps are error codes and indicate the following:

BEEPS	WHAT IT MEANS	WHAT TO DO
0 or 2	<ul style="list-style-type: none"> The device did not successfully decode the 10-second audio signal from the phone 	<ul style="list-style-type: none"> Refer to getroost.com/support Schedule a call with Roost: getroost.com/Callme
4	<ul style="list-style-type: none"> Wi-Fi password is incorrect OR Phone is not connected to 2.4 GHz Wi-Fi band (Audio setup only) OR Wi-Fi signal is poor 	<ul style="list-style-type: none"> Verify and re-enter your Wi-Fi password in the Encompass Smart Home App Change the network connection on your smartphone to a 2.4 GHz Wi-Fi band (audio setup only) Move closer to your Wi-Fi router
6	<ul style="list-style-type: none"> Your device is not communicating between your Wi-Fi network and the Roost Cloud 	<ul style="list-style-type: none"> Make sure your connection to the internet is working

USE AND CARE OF YOUR LEAK DETECTOR:

Here are the most common locations to place your smart leak detector*

- Behind bathroom toilet
- Under kitchen sink
- Near hot water heater
- Next to washing machine

*Make sure that the Wi-Fi signal strength is sufficient in these locations

Your leak detector is water-resistant, not waterproof. Please avoid immersing the detector in water or placing it where water may drip into the top cover holes. The leak detector warranty does not cover damage due to a detector being immersed in water.